

LITHIUM-READY CENTRIFUGE PROVEN DOWNSTREAM PROCESSING

Ferrum's PM-230 centrifuge is engineered specifically for lithium applications - delivering low residual moisture levels with high reliability in a scalable, continuous process. Operates under a fully inert atmosphere with < 1% oxygen and < 0.01% CO₂ for maximum product purity.

The rental unit is a compact, ready-to-use system, including control system and operator panel. It's easy to transport and quick to install at your site.



EASY SETUP

- + Plug & play design with built-in Control System
- + Smallest footprint
- + Simple interface



SIMPLE TO USE

- + Integrated thickening cone
- + User friendly control panel*
- + Peripherals available on demand



EFFICIENT SUPPORT

- + Engineering services
- + Process experts
- + Customized setup
- + Auxiliary equipment available



*OPTION: PURGE READY FOR E. G. LITHIUM


- + Integral design and optimized for purging
- + Ensure low O₂ and CO₂ level
- + O₂ < 1% possible
- + CO₂ < 0.01% possible



GUARANTEED SUCCESS

- + Results easily scalable
- + Efficient washing system
- + Different sieves easily exchangeable

TECHNICAL DATA

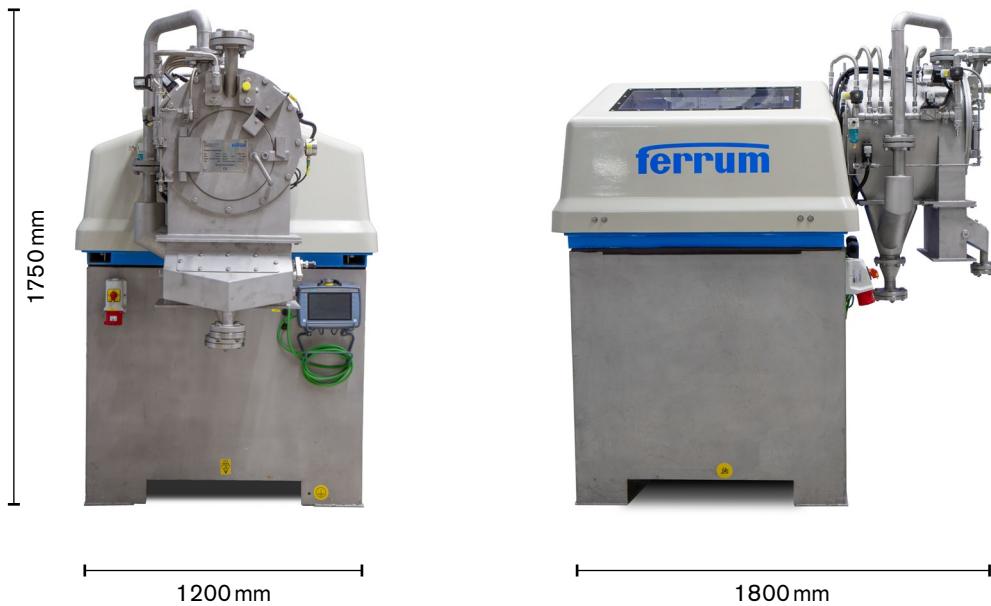

Weight centrifuge system	1200 kg
Operating voltage	3 × 400 V / 50 Hz
Max. installed power	4 kW
Throughput	100–1200 kg/h
Compliance	CE



INTERESTED?

We will be happy to provide you with further information and support you with your application.

► prch.sales@ferrum.net